


ARK-LUX

Clean, modern styling to compliment the appearance of both landscape and structure by day or night. Aluminium tube construction with tough polycarbonate head and reflector provide a good vandal resistance. Available in three options, root mounted for extra vandal resistance and plate mounted in two size options. Also available in silver grey colour finish and any other RAL colour finish by special order.

ASK ABOUT LED


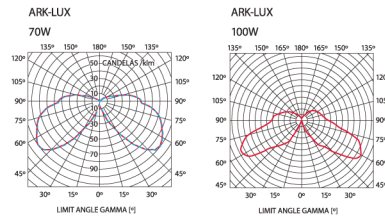


DESCRIPTION	LAMP	Wt.(kg)	PART No.
PLATE MOUNTED (730MM) IP54			
HIGH PRESSURE SODIUM			
50W	S.1	7.70	ABOL50S/73
70W	H.3	7.70	ABOL70S/73
MERCURY BLENDED FLU.			
50W	M.1	7.70	ABOL50M/73
80W	M.1	7.70	ABOL80M/73
METAL HALIDE			
70W	H.3	7.70	ABOL70H/73
COMPACT FLUORESCENT			
26W S/START	CF.4	7.70	ABOL26/73
26W HF	CF.4	7.70	ABOL26/HF/73
32W HF	CF.5	7.70	ABOL32/HF/73
42W HF	CF.6	7.70	ABOL42/HF/73
57W HF	CF.7	7.70	ABOL57/HF/73
GLS-ES			
100W GLS	I.2	6.30	ABOL100/73

PLATE MOUNTED (1000MM) IP54			
HIGH PRESSURE SODIUM			
50W	S.1	7.90	ABOL50S/100
70W	H.3	7.90	ABOL70S/100
MERCURY BLENDED FLU.			
50W	M.1	7.90	ABOL50M/100
80W	M.1	7.90	ABOL80M/100
METAL HALIDE			
70W	H.3	7.90	ABOL70H/100
COMPACT FLUORESCENT			
26W S/START	CF.4	7.90	ABOL26/100
26W HF	CF.4	7.90	ABOL26/HF/100
32W HF	CF.5	7.90	ABOL32/HF/100
42W HF	CF.6	7.90	ABOL42/HF/100
57W HF	CF.7	7.90	ABOL57/HF/100
GLS-ES			
100W GLS	I.2	6.50	ABOL100/100

ROOT MOUNTED (1350MM) IP54			
HIGH PRESSURE SODIUM			
50W	S.1	8.20	ABOL50S
70W	H.3	8.20	ABOL70S
MERCURY BLENDED FLU.			
50W	M.1	8.20	ABOL50M
80W	M.1	8.20	ABOL80M
METAL HALIDE			
70W	H.3	8.20	ABOL70H
COMPACT FLUORESCENT			
26W S/START	CF.4	8.20	ABOL26
26W HF	CF.4	8.20	ABOL26/HF
32W HF	CF.5	8.20	ABOL32/HF
42W HF	CF.6	8.20	ABOL42/HF
57W HF	CF.7	8.20	ABOL57/HF
70W HF	CF.77	8.25	ABOL70/HF
GLS-ES			
100W GLS	I.2	6.80	ABOL100

Black as standard, PLEASE CONTACT US FOR INFO ON THE LED VERSION

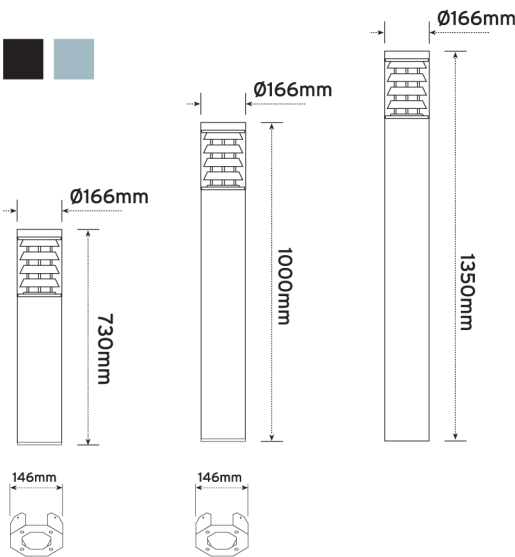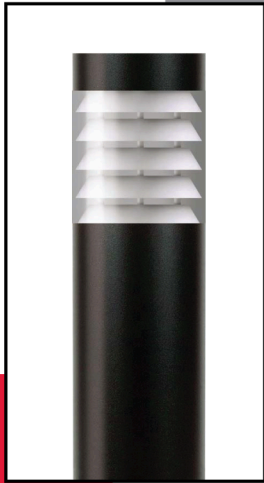

- LED 24v, 10w
- S.1 - SON-E (E27) Internal ignitor
- M.1 - MBF/U (E27)
- I.2 - Incandescent (E27) ES
- H.3 - Metal Halide (E27)
- CF.4 - Compact fluorescent, 2 pin, (GX24d-3), triple
- CF.5 - Compact fluorescent, 4 pin, (GX24q-3), triple
- CF.6 - Compact fluorescent, 4 pin, (GX24q-4), triple
- CF.7 - Compact Fluorescent QE, 4 Pin, (GX24q-5), triple
- CF.77 - Compact Fluorescent QE, 4 Pin, (GX25q-6), triple

TECHNICAL SPECIFICATION

HOUSING	Tube die cast aluminium
DIFFUSERS	Polycarbonate
LOUVRE	White high temperature thermo-plastic
CONTROL GEAR	Available with a wide variety of options
ACCESS	Detachable head
FIXINGS	Corrosion and anti-seizure resistant
COLOUR	Black RAL 9011 as standard, Silver RAL 7000

IP54



Ark Lighting
 McGann House
 Chesham Rd
 Barnsley
 South Yorkshire
 S70 2NT

t: 01226 320737
 f: 01226 292997
 e: sales@arklighting.co
 w: arklighting.co