


FORTRESS - DOUBLE DOOR

A total of 9 sizes make up the Fortress Double Door pillar family. Retaining all the features of the single door variants, the double door pillars open up to give full access to the cabinet interior without the impedence of a central divider.

As with the single door products, the mild steel double door types can be obtained in two panel thickness with a hot dip galvanised finish or hot dip galvanising followed by paint.

When ordering stainless steel versions, the Customer can specify the grade and finish required although only one thickness is available.

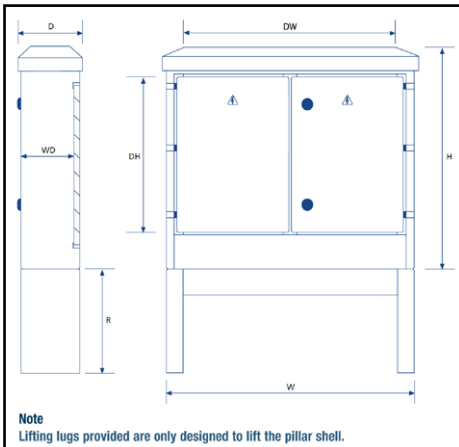

Dimensions (mm)

Pillar size code	14	16	18	20	22	24	26	28	30
Height above Ground (H)	1300	1300	1300	1300	1600	1600	1600	1600	1600
Root Section (R)	380	380	380	380	380	380	380	380	380
Width (W)	1250	1500	1750	2000	1250	1500	1750	2000	2250
Depth (D)	450	450	450	450	450	450	450	450	450
Door Opening Height (DH)	980	980	980	980	1280	1280	1280	1280	1280
Door Opening Width (DW)	1148	1398	1648	1898	1148	1398	1648	1898	2148
Working Depth (WD)	375	375	375	375	375	375	375	375	375
Backboard Size (WxH)	1225x1085	1475x1085	1725x1085	1975x1085	1225x1385	1475x1385	1725x1385	1975x1385	2225x1385
Weight (Kg) (thickness 3mm)	176	202	234	266	201	231	269	305	343

The ordering code consists of 4 sections

Pillar Size (mm)		Material Type		Nominal Material thickness		Options	
Ref.		Ref.		Ref.		Ref.	
14	H=1300 W=1250 D=450	HDG	Hot Dip Galvanised	2.5	2.5mm Stainless Steel	A	Internal Gland Plate
16	H=1300 W=1500 D=450	HDP	Hot Dip Galvanised and Painted (Grey as standard) Other colours available upon request	3	3mm	B	In fill panel for root section (standard colour: black)
18	H=1300 W=1750 D=450	STP	Stainless Steel	5	5mm	D	Yale Lock
20	H=1300 W=2000 D=450					E	Hasp and Staple
22	H=1600 W=1250 D=450					G	Heater Kit
24	H=1600 W=1500 D=450					H	13 Amp Socket Kit
26	H=1600 W=1750 D=450					I	Lighting Kit, door activated if required
28	H=1600 W=2000 D=450					J	Document pocket inside door
30	H=1600 W=2250 D=450					SS	Stainless Steel
						S	If "S" Special requirement is selected, a full description with diagrams & specification must be provided

SPECIFICATION

- Long life solid stainless steel hinge blocks on all versions
- Three vandal resistant fully flush hinges per door
- Two wedge locks fitted as standard
- Backboard made from 18mm treated exterior grade plywood
- Detachable roof with lifting hooks on pillar body

- 'Danger' warning label fitted in door recess
- Detachable root section finished in bitumen enriched paint
- Earth lead between pillar body and door
- High quality UV resistant paint to an average thickness of 60 microns
- Door seal to IP65

Anti vandal lock available. (See Feeder Pillar Accessory page)

OPTIONS

- Customer specification pre-wired solutions available
- Other colours / labels available to special order
- Optional G2A Highways Agency paint specification