




## Dinky 1 (SA2)



### Size illustration



### Features

- Compact & Lightweight design
- Lowest Capex/Quick ROI
- Philips LED
- Suitable for P3/P4/P5 class
- 35/55w SOX, 50w/70w SON replacement

## Dinky 2 (SA3 & SA5)




<b>Product Family Name:</b>	"Dinky"	<b>Input Voltage:</b>	100-240 AC
<b>Product Family Code:</b>	SA_>Optic<.>Colour temp<.>drive current<>LM<	<b>Input Frequency:</b>	50-60Hz
<b>LED Type:</b>	Luxeon M	<b>Control Signal:</b>	SA2 – Photocell only SA3 & SA5 Optional 0-10v/DALI/Photocell
<b>LED Colour Temp:</b>	4000K Standard (3000K/5000K optional)	<b>Chassis Material:</b>	Die-cast Aluminium
<b>CRI:</b>	>70	<b>Chassis Colour:</b>	Grey RAL7040 (other colours available)
<b>Light Source Replaceable:</b>	YES	<b>Optical Cover/lens:</b>	Polycarbonate
<b>Power Supply:</b>	Integrated (external optional)	<b>Mechanical Accessories:</b>	SA2 = Post top or Side Entry bracket
<b>Optical Type:</b>	Road Type I, III, IV & Area Type V	<b>Weight:</b>	SA2 - 1.6Kg SA3 – 3.8kg
<b>Optical Distribution:</b>	Multi Layer	<b>System Power:</b>	9w to 42w
<b>Optical Cover/Lens:</b>	Yes	<b>Luminous flux:</b>	890LM to 4080LM
<b>Photocell:</b>	Mini-Cell or Nema	<b>LED Luminaire efficacy:</b>	98-105 Lm/W
<b>Power Cable:</b>	Supplied with 6m	<b>Surge Protection</b>	4KV (10KV Option available)
<b>IP Rating:</b>	IP65	<b>Working Temp:</b>	-20° to +50°C
<b>Mounting:</b>	Side Entry >34/42mm or Post Top 76 (To Specify)	<b>Lifetime:</b>	>50,000hrs (L90 B50 F10)
<b>Aiming Angles:</b>	SA2 = 0 / SA3 & SA5 = 0 to +5degrees	<b>Warranty:</b>	5 Years (extended warranty option available)
<b>UMSUG Codes:</b>	Yes		




Model	Lumen Package (LM) 5000K	Lumen Package (LM) 4000K	Power (W)	
SA2.350 &	940	890	9	SA2 & SA3
SA2.500	1343	1271	14	
SA2.700	1880	1780	18	
SA3.1	2720	2530	28	
SA5.700	2720	2530	28	SA5
SA5.1	4080	3800	42	

## Dimensions (mm)


### Dinky 1 Side Entry

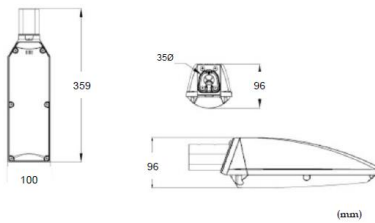


### Post Top

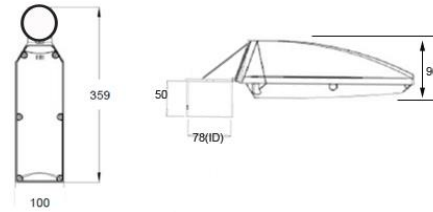

### Dinky 2 Side Entry



### Post Top

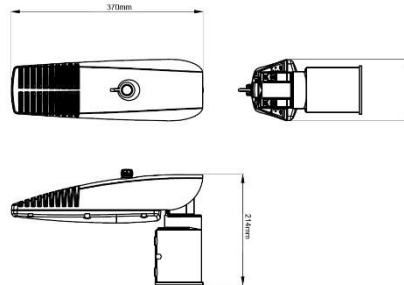

## Photometry

