



Dinky – LED Street Light



Size illustration



Features

- Compact design
- Lowest Capital Cost
- Philips LED
- Suitable for P4/P5 class
- 35/55w SOX, 50w/70w SON replacement


Product Family Name:	"Dinky"	Input Voltage:	90-277V
Product Family Code:	SA.>Optic<.>Colour temp<.>drive current<>LM<	Input Frequency:	50-60Hz
LED Brand:	Philips Lumileds	Control Signal:	OPTIONAL
LED Colour Temp:	4000K or 5000K	Chassis Material:	Die-cast Aluminium
CRI:	>70	Chassis Colour:	Two tone Grey
Light Source Replaceable:	YES	Optical Cover/lens:	Polycarbonate
Power Supply:	Integrated (external optional)	Mechanical Accessories:	Post top bracket
Optical Type:	Road Type I, II, III, IV & Area Type V	Weight:	1.6Kg
Optical Distribution:	Multi Layer	System Power:	9w to 18w
Optical Cover/Lens:	Yes	Luminous flux:	890LM to 1880LM
Dimmable:	OPTIONAL	LED Luminaire efficacy:	98-105 Lm/W
Photocell:	OPTIONAL	Surge Protection	4KV
Power Cable:	Supplied with 6m	Working Temp:	-20° to +50°C
IP Rating:	IP65	Lifetime:	L90 B50 F10
Mounting:	Side Entry >34mm (PT with bracket)		
Aiming Angles:	Set by bracket		
UMSUG Codes:	Yes		




Model	Lumen Package (LM) 5000K	Lumen Package (LM) 4000K	Power (W)
SAS1	940	890	9
SAS2	1343	1271	14
SAS3	1880	1780	18

Dimensions (mm)


Side Entry

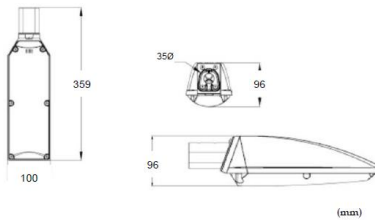


Post Top

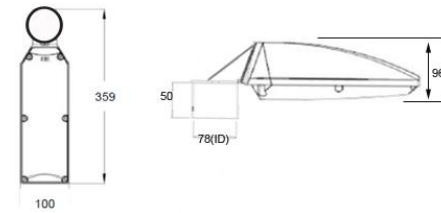


Photometry

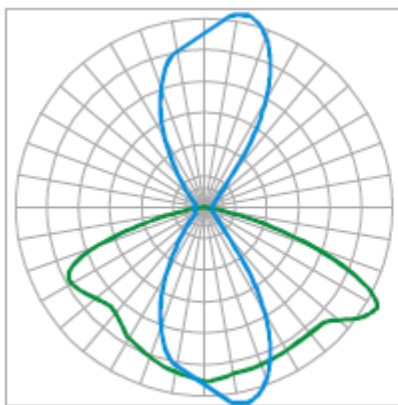

TYPE I

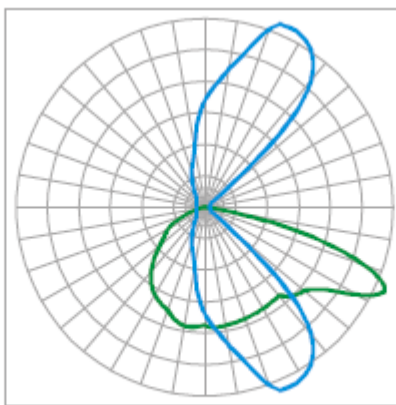

TYPE III

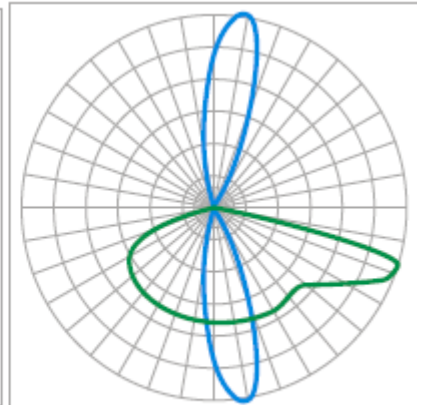

Roadway