




The bollard base plate must be secured to the ground by adequate means for the ground conditions. We recommend a concrete foundation with J bolts (available separately).

General Installation information

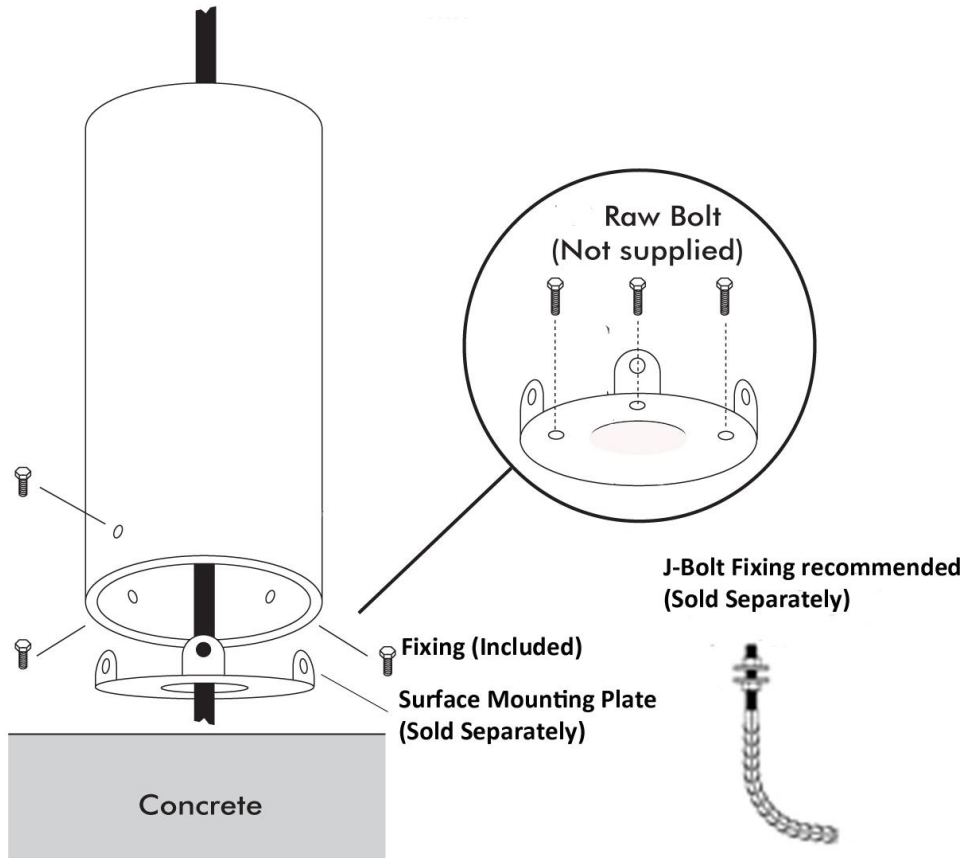

NOTE: The unit must be wired in accordance with current IEE wiring regulations. The distance between the lighting unit and any surface must be a minimum of 0.5m. It is normal for the polycarbonate lens to discolour over time. Spares available on request.