

Canon 30 Square Uplighter with adjustable beam angle

WE ARE LIGHT



Connecting cities, communities and lives

LUMINAIRE:

- Die-cast aluminum body and aluminum mounting box
- Stainless steel frame
- Shock resistant tempered glass cover
- Walk over and drive over capacity up to 12 mph

OPTICAL SYSTEM:

- Polycarbonate UV-resistant lenses
- Symmetrical light distribution
- Ultra spot, spot, narrow, medium, flood, wide flood and elliptic optics
- Built-in anti-glare grille for improved visual comfort
- Directional optical system $-5^{\circ} \sim +15^{\circ}$

LIGHT COLOUR MANAGEMENT:

- High uniformity and consistency for facade lighting
- RGBW version available for colour mixing versions

INSTALLATION:

- For outdoor installation with ground recessed mounting box
- Anti-slip glass as optional accessory for improved safety (MOQ)




QUICKINFO

Inground 30W, 4 high-power LEDs
Input DC24V constant voltage
Remote power supply ordered separately
On-board driver available on request (240v)



DIMENSIONS

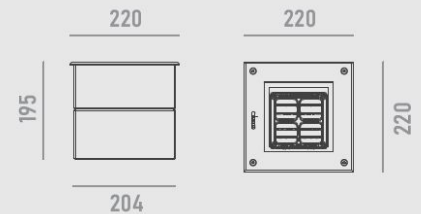

CODE	Optics	Light colour	Control	Finish colour	Luminous flux
CIG1918W30	spot 5° 0005	2700K 2780	ON/OFF	stainless steel 01	2,250lm
	spot 8° 0008	3000K 3080			
	narrow 12° 0012	4000K 4080			
	medium 20° 0020				
	medium 30° 0030				
	flood 45° 0045				
	wide flood 60° 0060				
	elliptic 10°x70° 1070				


WE ARE LIGHT



Connecting cities, communities and lives

Accessories:

anti-slip glass



Note: MOQ may apply