


Swivel Bracket  
(Optional)

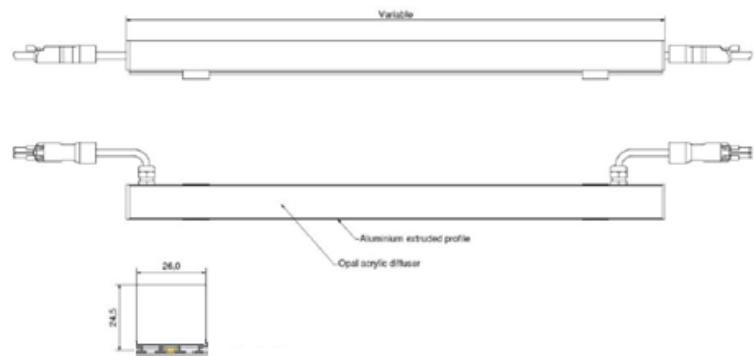

<b>Product Family Name:</b>	Line
<b>Product Family Code:</b>	5554.....
<b>LED Brand:</b>	Cree / Philips / Nichia / Osram
<b>LED Colour Temp:</b>	3000K, 4000k or 5000k or RGB
<b>CRI:</b>	>70
<b>Light Source Replaceable:</b>	Yes
<b>Power Supply:</b>	External
<b>Optical Type:</b>	NA
<b>Optical Distribution:</b>	90°
<b>Optical Cover/Lens:</b>	Yes
<b>Dimmable:</b>	Optional
<b>Photocell:</b>	n/a
<b>Power Cable:</b>	Optional
<b>IP Rating:</b>	IP20 (IP65 on request)
<b>Mounting:</b>	By rear grooves (Bracket Optional)
<b>Aiming Angles:</b>	0° with clips (bracket 360°)
<b>UMSUG Codes:</b>	Yes

<b>Input Voltage:</b>	Set by driver
<b>Control Signal:</b>	(set by driver)
<b>Chassis Material:</b>	Anodised Aluminium
<b>Chassis Colour:</b>	Natural
<b>Optical Cover/lens material:</b>	Polycarbonate
<b>Mechanical Accessories:</b>	Bracket optional
<b>Weight:</b>	
<b>Length:</b>	100mm to 3000mm
<b>System Power:</b>	13w/m, 20w/m, 30w/m 1572Lm/m, 2200Lm/m, 3300Lm/m
<b>Luminous flux:</b>	
<b>LED Luminaire efficacy:</b>	120Lm/w
<b>Surge Protection</b>	n/a
<b>Working Temp:</b>	-20 to +50°C
<b>Lifetime:</b>	>50,000hrs B50, L70, F10