



Product Family Name:	Line
Product Family Code:	5554.....
LED Brand:	Cree / Philips / Nichia / Osram
LED Colour Temp:	3000K, 4000k or 5000k or RGB
CRI:	>70
Light Source Replaceable:	Yes
Power Supply:	External
Optical Type:	NA
Optical Distribution:	90°
Optical Cover/Lens:	Yes
Dimmable:	Optional
Photocell:	n/a
Power Cable:	Optional
IP Rating:	IP20 (IP65 on request)
Mounting:	By rear grooves (Bracket Optional)
Aiming Angles:	0° with clips (bracket 360°)
UMSUG Codes:	Yes

Input Voltage:	Set by driver
Control Signal:	(set by driver)
Chassis Material:	Anodised Aluminium
Chassis Colour:	Natural
Optical Cover/lens material:	Polycarbonate
Mechanical Accessories:	Bracket optional
Weight:	
Length:	100mm to 2000mm
System Power:	13w/m, 20w/m, 30w/m 1572Lm/m, 2200Lm/m, 3300Lm/m
Luminous flux:	
LED Luminaire efficacy:	120Lm/w
Surge Protection	n/a
Working Temp:	-20 to +50°C
Lifetime:	>50,000hrs B50, L70, F10






Dimensions




Fixation

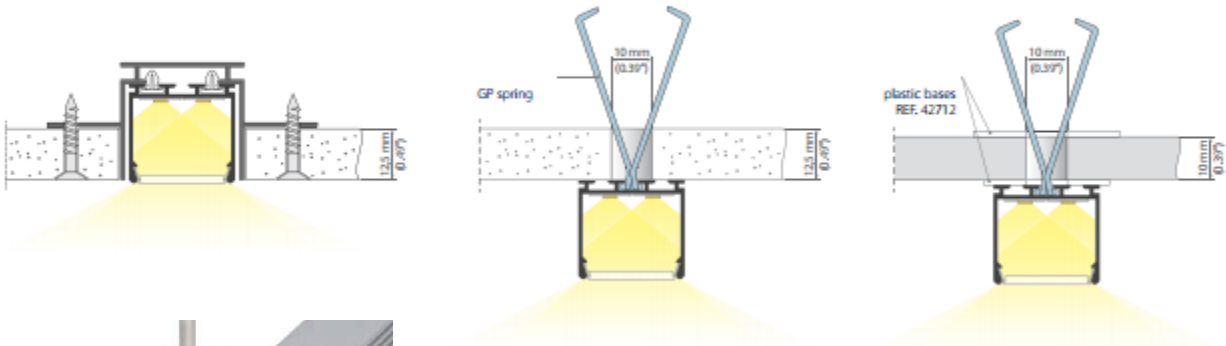

Recessed, surface or suspended



Installation

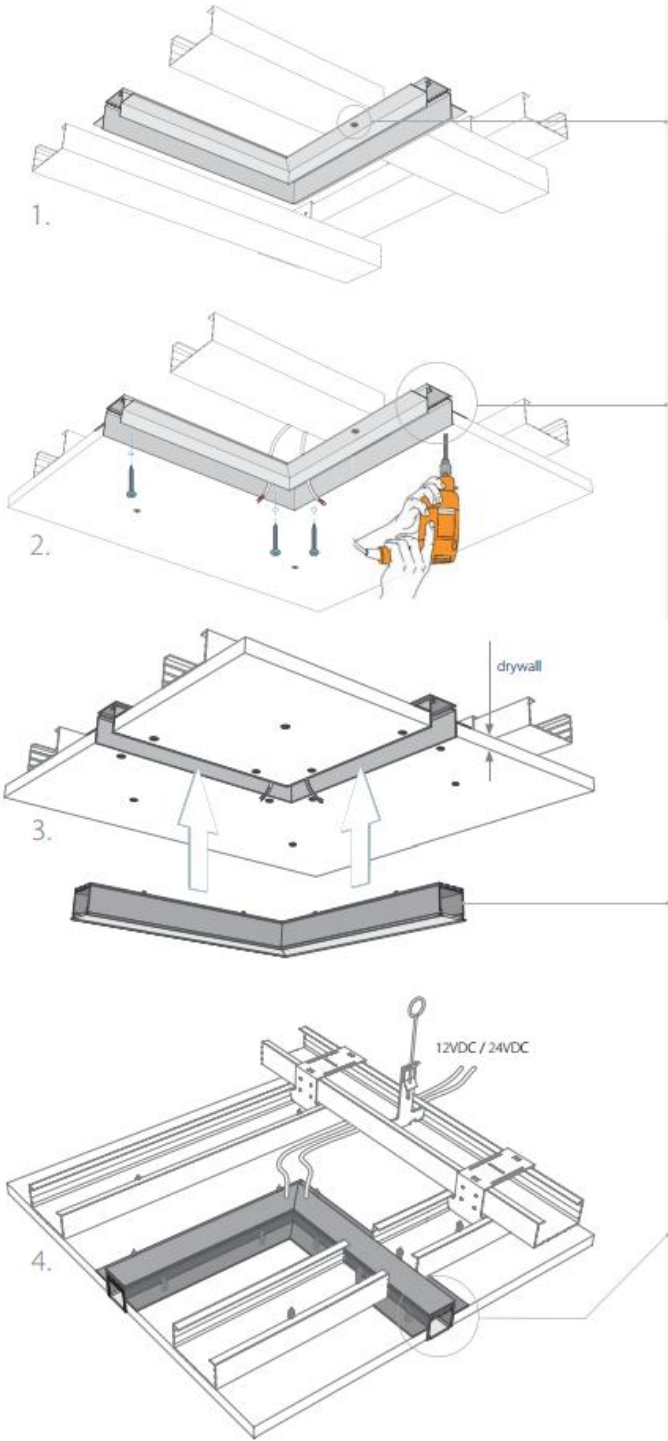

mounting the profile with the support structure of the ceiling

