






Multi-way Marker LED

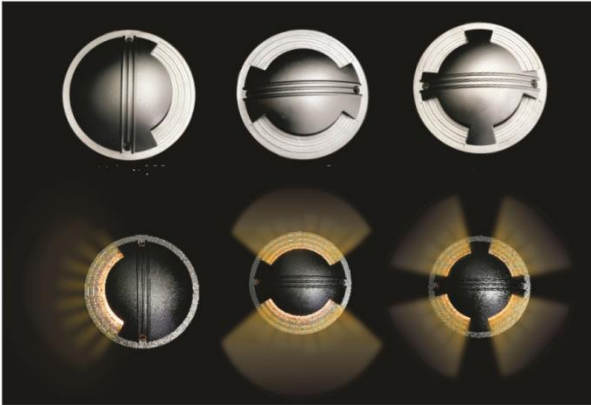


High Beam version

Dimensions

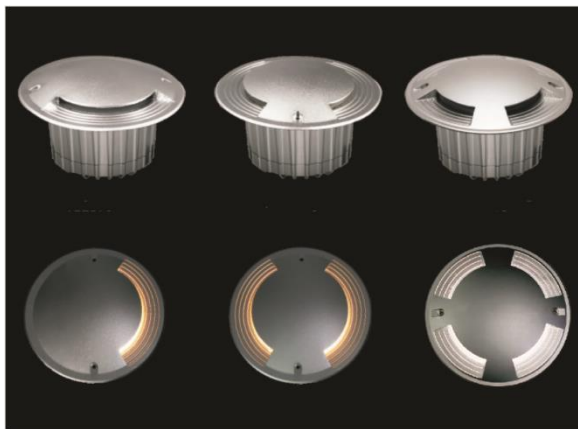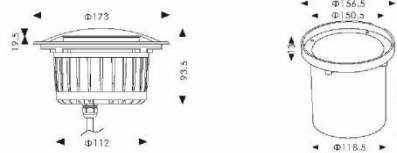

Marker version

Dimensions

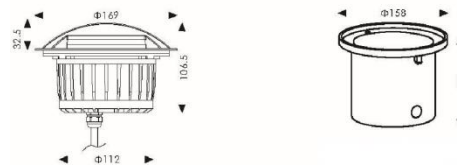

Product Family Name:	Multi-way Marker LED
Product Family Code:	ACFRMW-IG->No. of ways<->High Beam or Marker<->CCT<->Voltage<
LED Brand:	LED
LED Colour Temp:	Cool white or coloured LED or RGB
Light Source Replaceable:	No
Power Supply:	LV-Separate or Mains - Intergrated optional
Optical Type:	flood or spot
Optical Distribution:	1, 2, 3 or 4 way
Optical Cover/Lens:	Polycarbonate
Dimmable:	n/a
Photocell:	n/a
Power Cable:	LV = 0.5m HO5RN-F 2x1mm ² , Mains = 0.5m HO5RN-F 3x1mm ²
IP Rating:	IP67
Mounting:	Recessed

Input Voltage:	LV = 12 or 24VDC / Mains = 240VAC
Control Signal:	n/a
Chassis Material:	Die-cast Aluminium
Chassis Colour:	Silver
Optical Cover/lens:	2000KG rated drive over
Options:	n/a
Mechanical Accessories:	Mounting sleeve included
Weight (Kg):	1.6
Windage (m²):	n/a
System Power (w):	High Beam - 3 watt@24vDC, 3.8w@240vAC
System Power (w):	Marker - 1 watt@24vDC, 1.4w@240vAC
Impact rating:	IK10
Surge Protection	n/a
Working Temp:	-20° to +40°C