

ARK

LIGHTING




HLX Heavy Duty Lowbay / Highbay

The HLX is the latest in the range created for difficult environments. Rated at IP65 and with a heavy duty steel housing makes it ideal for factories, Sports halls and environments that have airborne OIL/Grease, Dust and Moisture with the added risk of potential impact from machinery or sports equipment. A choice of Lens and optics make this fitting ideal for mounting heights of 4-14M.



LED HLX
HEAVY DUTY

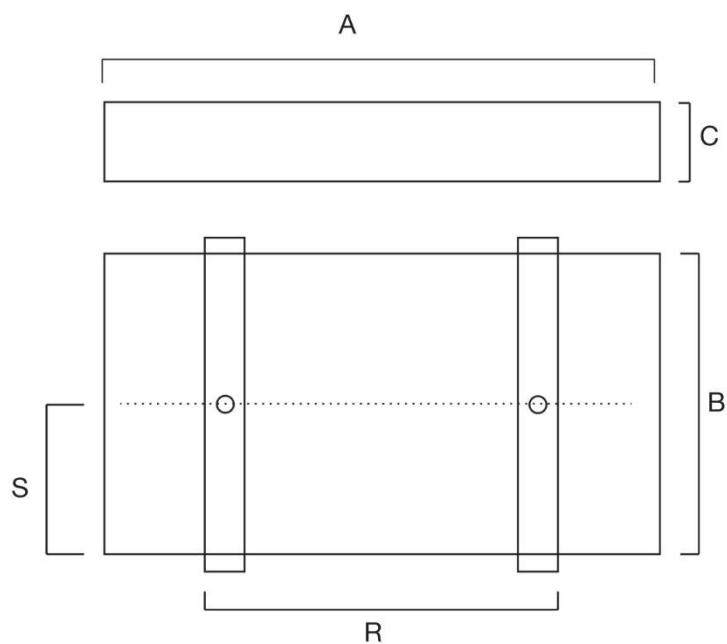

				Dimensions (mm)					
	Power (w)	Opal (Lm)	Efficacy (Lm/w)		A. Length	B. Width	C. Depth	R. Fixing L	S. Fixing W
HLX235/WB/4	70	9,100	130		1220	175	110	1000	127
HLX335/WB/4	105	13,650	130		672	330	110	540	165
HLX435/WB/4	140	18,200	130		1220	255	110	1000	127

3=3000K, 4=4000K, 5=5700K. Lm = System lumen output

**Higher Lumen Packages available upon request

All fittings unless requested fitted with 1m length of power lead.

Luminarie type :
NB - Narrow Beam
WB - Wide Beam

Powder coated steel housing or Stainless Steel

Toughened laminated glass lense


Polycarbonated lens available :
Clear / Opal

Power Supply :
Helvar / BAG / Venture

LED :
Nichea

Colour Temperature :

Fitted Motion and daylight sensors available

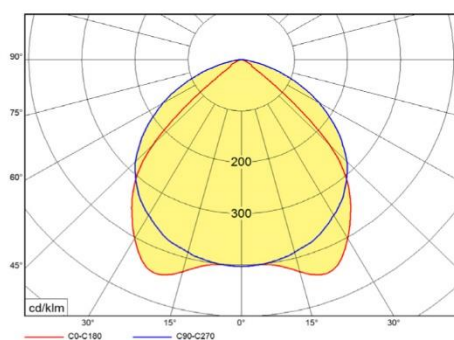

**Ask about having this fixture >Your Company< branded