




Weathershield is a durable, high-specification LED fixture that provides the best solution for installations in difficult environmental conditions, without compromising on performance.

The tough non-corrosive polycarbonate body and stainless steel cover clips offer protection to high output LED modules, ensuring that durability and reliability are at the forefront of the **Weathershield's** capabilities. This emphasis on long-term performance manifests in substantial energy and maintenance cost savings.



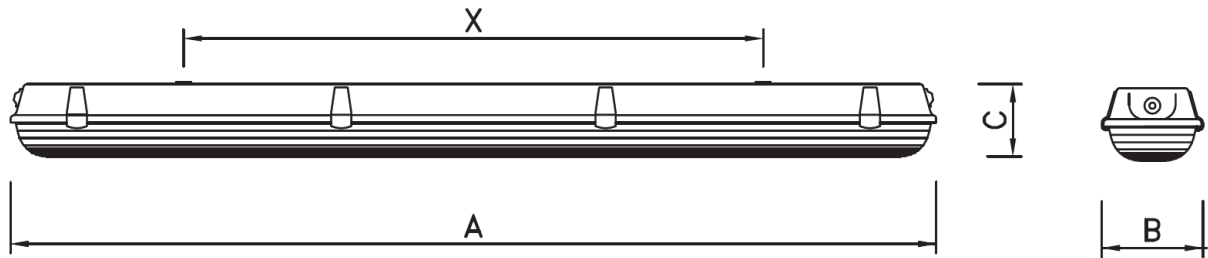

Product Code	Power (W)	Output (lm)	lm/W	A	B	C	X	Weight (kg)
APL1000S1W4ND	11	1 450	132	675	135	100	400	1.8
APL2500S2W4ND	20	2 750	138					1.8
APL2500M1N4ND	20	2 700	135	1275	84		800	2.2
APL5000M2W4ND	40	5 500	138		135			2.6
APL3500L1N4ND	32	4 400	138	1575	84		1100	2.8
APL7000L2W4ND	50	7 500	150		135			3.2
APL10000L2W4ND	68	10 200	150					3.2

* CCT 3000°K – also available at 4000°K & 5000°K.

† Non-Dimmable – for Dimmable replace with ‘DIM’, for DALI replace with ‘DALI’.

Luminaire type:

84mm Narrow
135mm Wide

Body length:

675mm Small
1275mm Medium
1575mm Large

Body material:

Glass-reinforced polyester, Stainless steel clips

Cover type:

Opal

Colour temperature:

3000/4000/5000K°

LED brand:



Osram/Samsung

Accessories

- Suspension Cord - **54102**
- Suspension hook – **ZAHA**
- Fixing clip – **FCL**
- Protective guard – **OM**

Options

- 3hr Emergency
- PIR

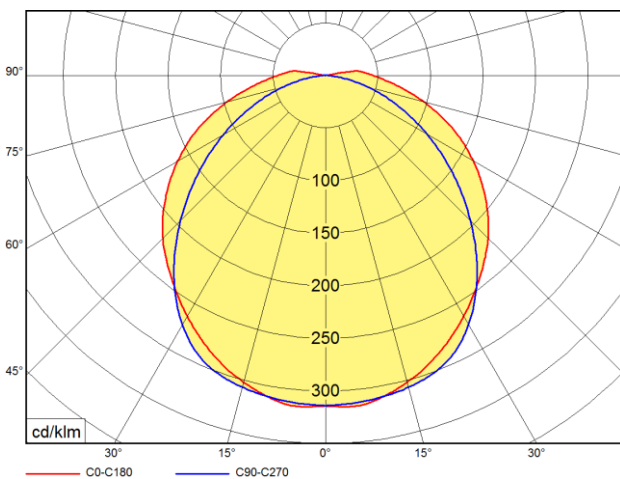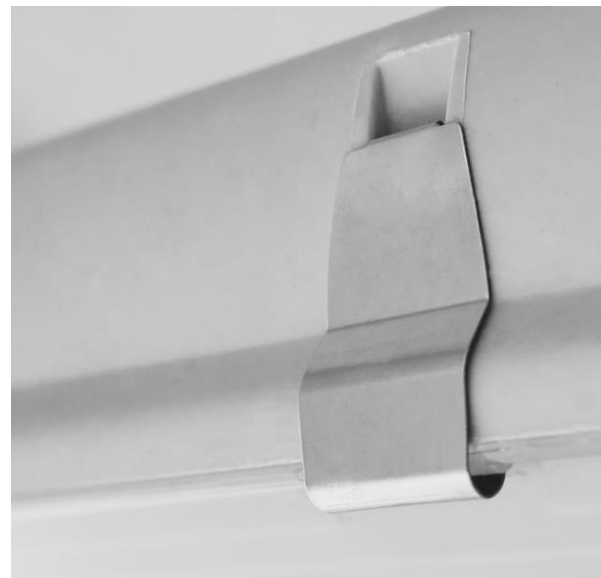

LED	CRI 80+	CRI 90+	80 000 L80B50	IP 65				max T _a 45°C