

VandaTube

Cornice & Surface Mounted Lighting System



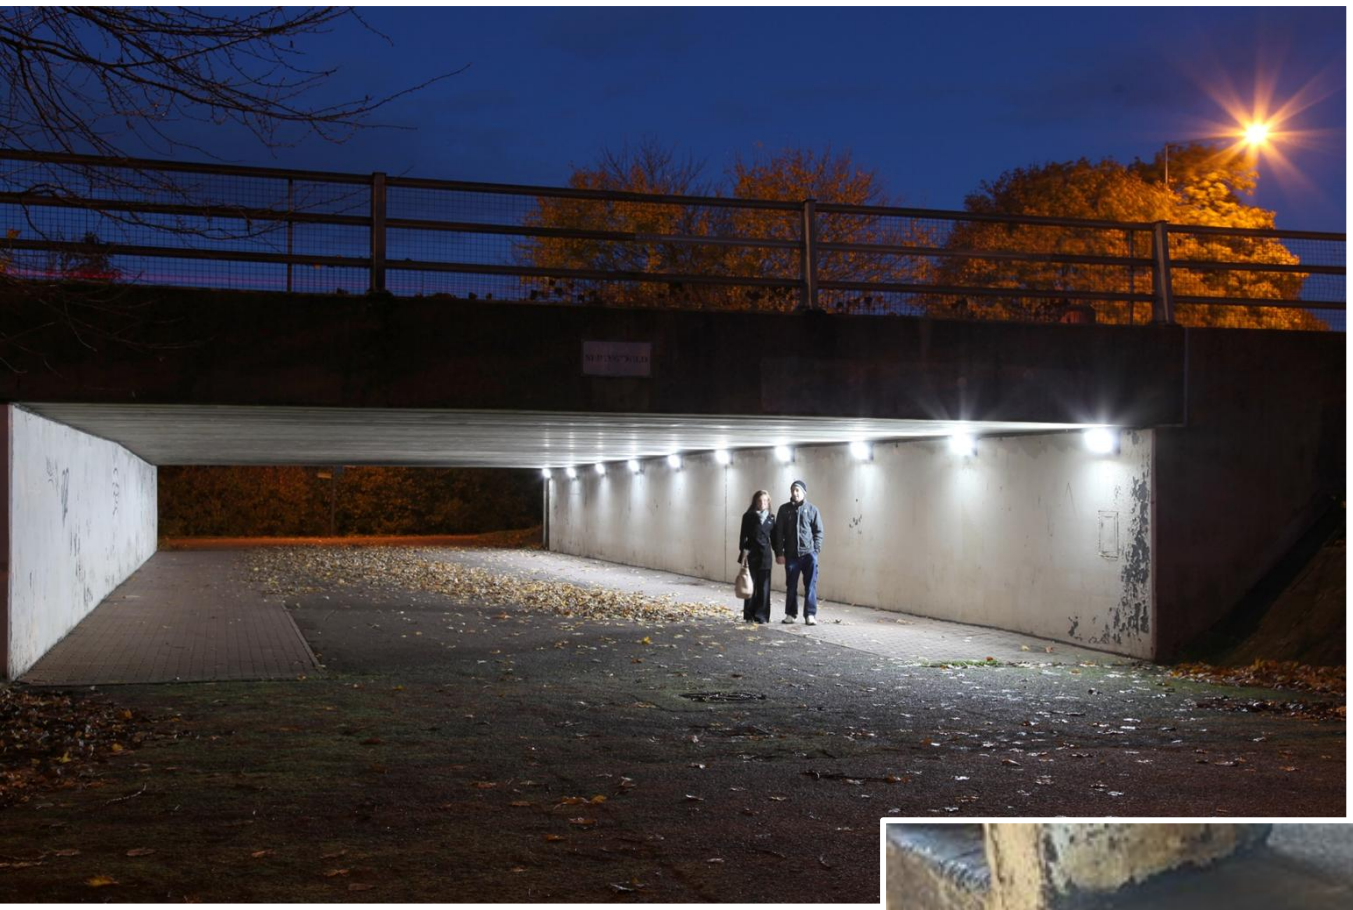

Designed for Harsh environments

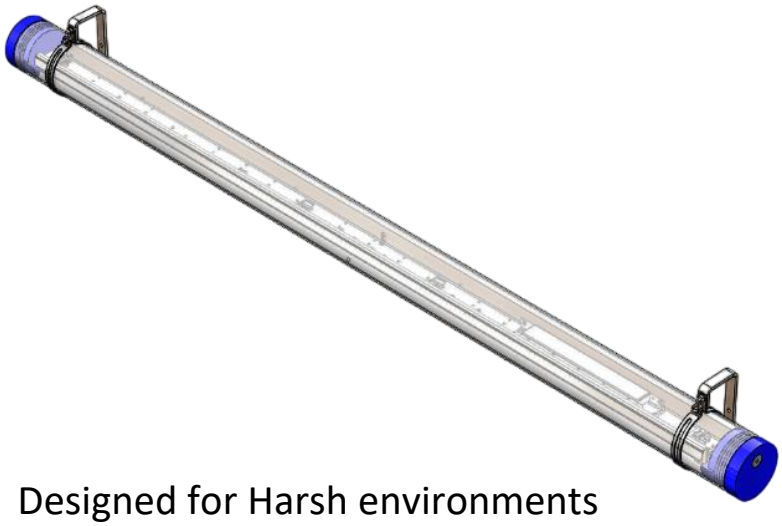

OPTIONS:

Length (mm)	Drive Current (mA)	Wattage (w)	PCB Lumen (Lm)	Luminaire Lumen (Lm)	Lm/w	EMG Luminaire Lumen (Lm) (3w)
2ft / 705	150	6.4	1290	**1058**	165	N/A
	350	15.7	2950	**2419**	154	N/A
	OTHER OUTPUTS AVAILABLE ON REQUEST					
4ft / 1265	150	12.8	2580	**2116**	165	496
	350	31.4	5900	**4838**	154	462
	OTHER OUTPUTS AVAILABLE ON REQUEST					
5ft / 1545	150	16	3225	**2645**	165	496
	200*	17.2*	3429*	**2736***	159*	477*
	350	39.2	7375	**6048**	154	463
	*figures for the fitting with built-in Microwave sensor					
	OTHER OUTPUTS AVAILABLE ON REQUEST					
6ft / 1823	150	19.2	3870	**3173**	165	496
	350	47.1	8850	**7257**	154	462
	OTHER OUTPUTS AVAILABLE ON REQUEST					

*Other sizes / outputs available on request

SPECIFICATION:

Product Family Name:	VandaTUBE	**Aiming Angles:**	Adjustable
Product Family Code:	AVT>Power><KLM><CCT><Length	**Input Voltage:**	90-277V
LED Colour Temp:	3000K / 4000K /5000K / 6000K	**Input Frequency:**	50-60Hz
CRI:	>70	**Control Signal:**	Optional - 0-10v or DALI or WIMAC
Light Source Replaceable:	YES	**Chassis Material:**	Stainless Steel
Power Supply:	Integrated	**Chassis Colour:**	Raw S/S
Optical Type:	120°	**Optical Cover/lens:**	Thermoformed polymer
Sizes:	2ft/705mm - 4ft/1265mm 5ft/1545mm - 6ft/1823mm Diameter: 90mm	**Approx Weight (Kg):**	2ft = 4kg / 4ft = 5.8kg 5ft = 7.2kg / 6ft = 8.6kg
Optical Cover/Lens:	Opal	**System Power:**	6w to 47w
DALI Dimmable:	OPTIONAL	**Luminaire lumens:**	1058 to 7257
Control:	Photocell / Microwave Sensor available	**LED Luminaire efficacy (lm/W):**	165lm/W
Power Cable:	1M flex	**Surge Protection:**	Optional
IP Rating:	IP69K	**Working Temp:**	-20° to +50°C
IK Rating:	IK10+	**Lifetime (hrs):**	>50,000
Emergency:	OPTIONAL (Red end caps)	**Mounting:**	Suspended or Surface