

Canon 20 Uplighter with adjustable beam angle



LUMINAIRE:

- Die-cast aluminium body and aluminium mounting sleeve
- Stainless steel bezel
- Shock resistant tempered glass cover
- Walk over and drive over capacity up to 12 mph

OPTICAL SYSTEM:

- Polycarbonate UV-resistant lenses
- Symmetrical light distribution
- Spot, narrow, medium, flood, wide flood and elliptic optics
- Built-in anti-glare grille for improved visual comfort
- Directional optical system $-5^{\circ} \sim +15^{\circ}$

LIGHT COLOUR MANAGEMENT:

- High uniformity and consistency for facade lighting
- RGBW version available for colour mixing versions (page 2)

INSTALLATION:

- For outdoor installation with ground recessed mounting sleeve
- Anti-glare grille as optional accessory for improved public comfort (MOQ)
- Anti-slip glass as optional accessory for improved safety (MOQ)




QUICKINFO

Inground 20W, 1 high-power LEDs
 Input DC24V constant voltage
 Remote power supply ordered separately
 On-board driver available on request (240v)



DIMENSIONS

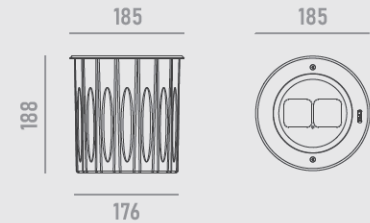

CODE	Optic	Light colour	Control	Finish colour	Luminous flux
CIG1914W20	spot 8° 0008	2700K 2780	ON/OFF	SS 01	1,600 lm
	narrow 12° 0012	3000K 3080			
	medium 20° 0020	4000K 4080			
	medium 30° 0030				
	flood 45° 0045				
	elliptic 10°x70° 1070				




QUICKINFO

In-ground 20W, 2 high-power LEDs
4-IN-1
Input voltage AC100-240V
Complete with built-in power supply




DIMENSIONS

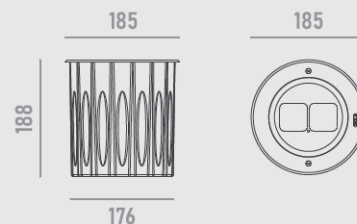


CODE	Optic	Light colour	Control	Finish colour	Luminous flux
CIG1914W20	spot 8° 0008	RGB+3000K 4130K	DMX512	SS 01	900 lm
	narrow 15° 0015	RGB+4000K 4140K			
	medium 20° 0020				
	medium 30° 0030				
	elliptic 15°x60° 1560				


Accessories:



anti-glare grille
for models with optics <= 30°



anti-glare grille



anti-slip glass

Note: MOQ may apply