

Dark Sky A & B



WE ARE LIGHT



Connecting cities, communities and lives

The Dark Sky A/B range of LED lanterns consists of 4 lanterns. 2 four sided lanterns and 2 six sided lanterns both with or without PIR sensor. The non-PIR versions can be constructed as either upward or downward lanterns.





The PIR versions can only be mounted as upward lanterns. Suitable for use in high saline coastal areas. Integral driver and 3000K 8W LED. Complete with 2 year warranty.

Dark Sky A

Dark Sky A PIR

Dark Sky B

Dark Sky B PIR

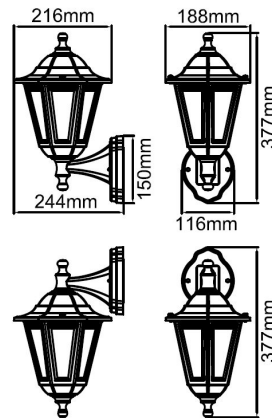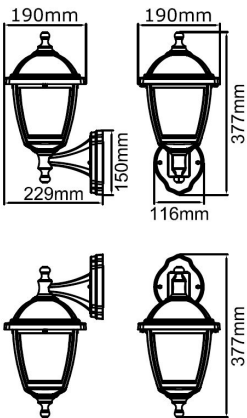

Product Features:

- 2 year warranty
- IP44
- Class II
- 8w 3000K
- Suitable for High Saline Areas
- Non Dimmable
- 4 Sided or 6 Sided options
- PIR Versions
- Non-PIR versions can be constructed to be mounted on the bracket in either an upward or downward style
- Life: L70 - 25,000hrs

WE ARE LIGHT



Connecting cities, communities and lives

Product Information							
Code	Description	Power (w)	Lumen (Lm)	CRI	PIR	Energy Class	Protection Class
DSA12BLK	8w 4 sided Up/Down Light	8	419	85	No	A	II
DSA13BLK	8w 4 sided Up/Down Light with PIR	8	419	85	Yes	A	II
DSB16BLK	8w 6 sided Up/Down Light	8	400	85	No	A	II
DSB17BLK	8w 6 sided Up/Down Light with PIR	8	400	85	Yes	A	II

Nominal voltage	220-240VAC
Operating frequency	50/60Hz
IP rating	44
Start time	<0.5 sec

PIR Specifications

Detection Range	1-8m@2m mounting height
Detection Angle	120°
Detection Speed	0.6~1.5 m/sec
Time Setting	90 seconds from last trigger non-adjustable
Lux Setting	On <30 lux – Off >80 lux non-adjustable
Manual Override	Yes – Switch power twice within 2 sec
Parasitic Power	<0.5W

Construction

Body: PP (Polypropylene)
Diffuser: PC (Polycarbonate)

Standards

BSEN60598-1:2015 Luminaires – Part 1: General requirements and tests

In Conformity with

LVD Low voltage directive 2014/35/EU
ERP Energy related products directive 2009/125/EC
RoHS Restriction of hazardous substances 2011/65/EU