
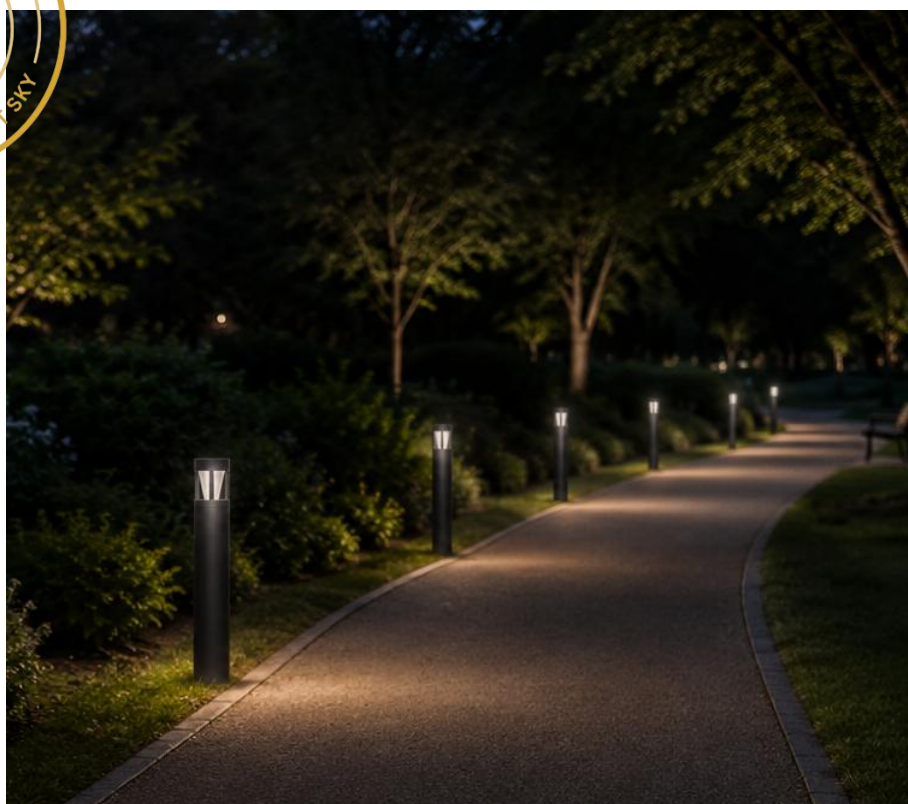


Acamarachi V2 LED Bollard

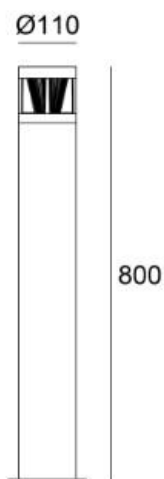

Surface Mount		Root Mount	

Product Family Name: Acamarachi V2 LED Bollard
Product Family Code: ALB.V2>LED.>Size<.>LED CRI<
LED Colour Temp: Cool White / Warm White
CRI: >70
Power Supply: Integrated
Optical Type: diffused
Optical Distribution: symmetrical
Optical Cover/Lens: PMMA
Dimmable: External DALI supported TRIAC,0-10V, PWM via external driver on request
Photocell: N/A
Power Cable: 0.5M of H05RN-F 3×1.0mm²
IP / IK Rating: IP65 / IK07
ULOR (upward light) Zero

Input Voltage: 100v to 240v
Input Frequency: 50-60Hz
Control Signal: N/A
Chassis Material: Die-cast aluminium
Chassis Colour: Black or Grey
Mechanical Accessories: Root mount via anchor bolts
Height (mm): 800
Diameter (mm): 110
System Power: 6w
Luminous flux: 265Lm
Working Temp: -25 to +40°C
Mounting: Surface or Root mounted